


HMB Series

High Efficiency Melt Blown Sediment Cartridges

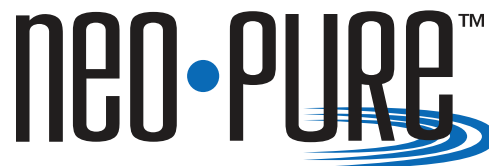

Commercial/Industrial Filtration Applications

Standard Features

- Manufactured in the USA
- Spun bonded 100% polypropylene for economical and efficient filtration
- High dirt-holding capacity and chemical compatibility
- Reduces sediment, dirt, and rust particles
- No glues or additives which could foam, discolor, or cause other undesirable effects for drinking water applications
- Filters available in standard 2-1/2" and 4-1/2" (BB-style) cartridge diameters
- 4-1/2" diameter graded density pore structure provides true depth-style filtration for higher dirt-holding capacity
- Tested and certified by WQA to NSF/ANSI Standard 42 for component and Standard 61
- High efficiency melt blown cartridges operate at 90% efficiency

Applications

- Aqueous Solutions
- Component Wash Fluids
- Coolants
- Cutting Fluids
- Fuels
- Light Oil
- Lubricants
- Mineral and Synthetic Oils
- Solvents
- Water
- Water Glycols

Product Specifications

Micron Ratings

0.5, 1, 3, 5, 10, 20, 25, 30, 50, 75, and 100 microns

Cartridge Lengths

9-7/8", 20", 30", and 40"

Outside Diameter

2-1/2" and 4-1/2" OD

Temperature Rating

40°F – 175°F (4.4°C – 79.4°C)*

Initial Pressure Drop

<1psi typical

Materials of Construction

Filter Media: 100% Polypropylene



HMB Series High Efficiency Melt Blown Cartridges are tested and certified by WQA to: NSF/ANSI 61 Standard & NSF/ANSI Standard 42 for material safety only


*Temperature ratings vary and depend on pressure and time under load

Ordering Guide (Example: HMBN-25098-S5W-222fS)

HMB		- 25	098	- 05	W		- 222f	S			
TYPE	MEDIA	DIAMETER	CARTRIDGE LENGTH	MICRON RATING	CORE MATERIAL	WRAPPING	GRADE	END CAP	GASKET		
HMB = High Efficiency Melt Blown Sediment Cartridge	Blank = Polypropylene (standard)	25 = 2.5"	098 = 9-7/8"	S5 = .05	Blank = No Core (standard) PP = Polypropylene X = Custom	Blank = Not Wrapped* W = Wrapped	Blank = >90% (standard)	Blank = DOE/no cap (standard)✓		Blank = Buna N	
		45 = 4.5"	195 = 19 1/2"	01 = 1				DOE/gasket	DOEG		E = EPDM
		Z = Custom	200 = 20"	03 = 3				222/flat	222f✓		S = Silicone✓
			292 = 29 1/4"	05 = 5				222/fin	222n✓		T = Teflon®
			300 = 30"	10 = 10				222/spring	222s✓		V = Viton®
			400 = 40"	20 = 20				226/flat	226f		N = Neoprene
			500 = 50"	25 = 25				226/fin	226n		
				30 = 30				226/spring	226s		
				50 = 50				SOE/flat	SOEf		
				75 = 75				SOE/fin	SOEn		
				100 = 100				SOE/spring	SOEs✓		
								custom	Z		

*9-7/8" and 20" filters are wrapped (standard). 30" and longer are not wrapped (standard).

Dimensions

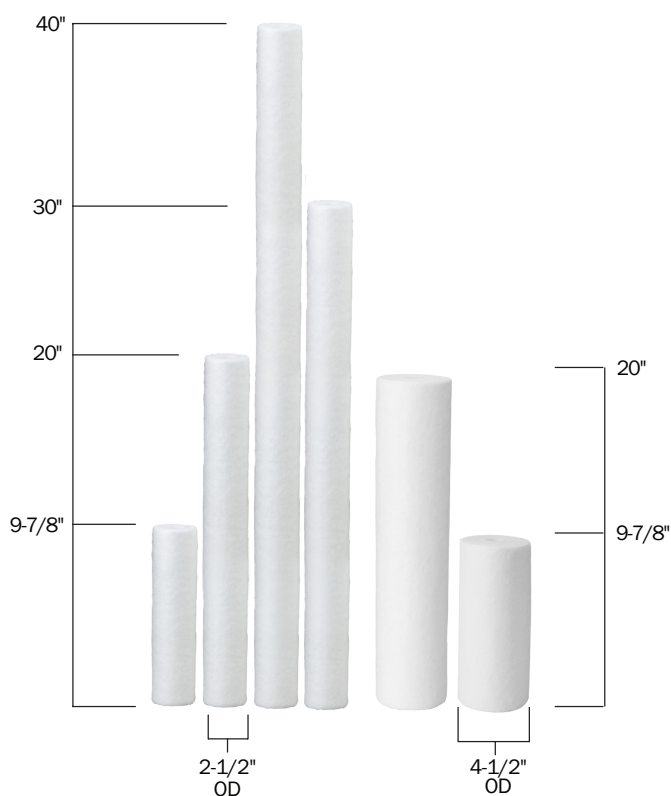

Available End Cap Configurations



All Illustrations © Copyright 2015 NeoLogic Solutions. All Rights Reserved.

Case Packs

DIMENSIONS	QUANTITY
2-1/2" x 9-7/8"	50
2-1/2" x 20"	25
2-1/2" x 29-1/4"	25
2-1/2" x 30"	25
2-1/2" x 40"	25
4-1/2" x 9-7/8"	12
4-1/2" x 20"	6

✓ The following cartridge combinations have been Tested & Certified to:
NSF/ANSI 61 Standard
NSF/ANSI 42 Standard - Component



**Filter Housings
Selection Guide**
[CLICK HERE](#)

NeoLogic
SOLUTIONS
Filtration Division

Contact your **authorized NeoLogic distributor** today:
Commercial Industrial Supply
1444 East Main Street, Rock Hill, SC 29730 USA
Tel: (866) 777-8001 Email: info@emailcis.com

We ship 5
days a week!

FedEx