


NP-RFG20BB

Radial Flow Filter Cartridge

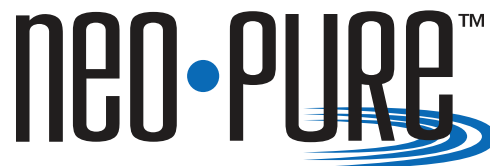

Contaminants Reduced:

- Chlorine Taste and Odor
- Dirt
- Rust
- Sediment



Residential/Commercial Filtration Applications

Standard Features

- Manufactured in China
- Environmentally-friendly coconut shell granular activated carbon (GAC) filter
- Ideal for point-of-entry (POE) and other high flow rate application
- Compatible with Pentek® RFC20-BB, 155247-43, Watts® MAXRFL-FF20
- Drop-in cartridge style

Product Specifications

Filter Media

Coconut shell granular activated carbon (GAC)

Micron Rating (Nominal)

25 microns

Dimensions

4-1/2" dia. x 20"

Capacity

40,000 gallons

Operating Temperature

40 to 100°F (4.4 to 37.8°C)

Operating Pressure

30 to 100 psi

Maximum Flow Rate

6 gpm

Change Frequency

6 months

WARNING:

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.



Contact your **authorized NeoLogic distributor** today:

Commercial Industrial Supply

1444 E. Main St., Rock Hill, SC 29730

Tel: (866) 777-8001 **Email:** info@emailcis.com